


Hydraulic
Excavators **DP 4/DP 5**

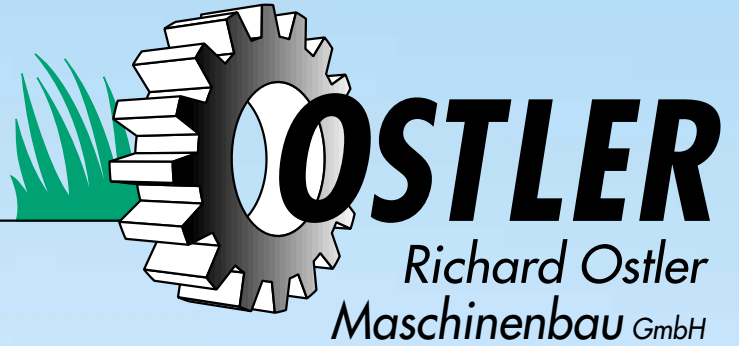

**Top technology,
top effect!**

• Optimum CAD-developed kinematics!


• Cone shaped dipper shovel for better discharge of bulk material

Hydraulic Excavators

Technical Data:

	DP 4	DP5
Maximum range	4,000 mm	5,000 mm
Maximum discharge height	4,300 mm	5,000 mm
Maximum operational depth of dipper shovel	2,200 mm	3,000 mm
Maximum operational depth of earth scoop	2,600 mm	3,250 mm
Overall width	1,900 mm	1,900 mm
Diameter of turntable	500 mm	700 mm
Slewing range	endless	endless
Torque	1020 Nm	1620 Nm
Unladen weight without tools	700 kg	950 kg
Lifting capacity without tools	500 - 950 kg	900 - 1,430 kg
Speed of power take-off shaft	540 revs/min	540 revs/min
Necessary tractor minimum	50 cont. hp.	90 cont. hp.

Dimensions are not binding. Changes in design may be subject to alterations.

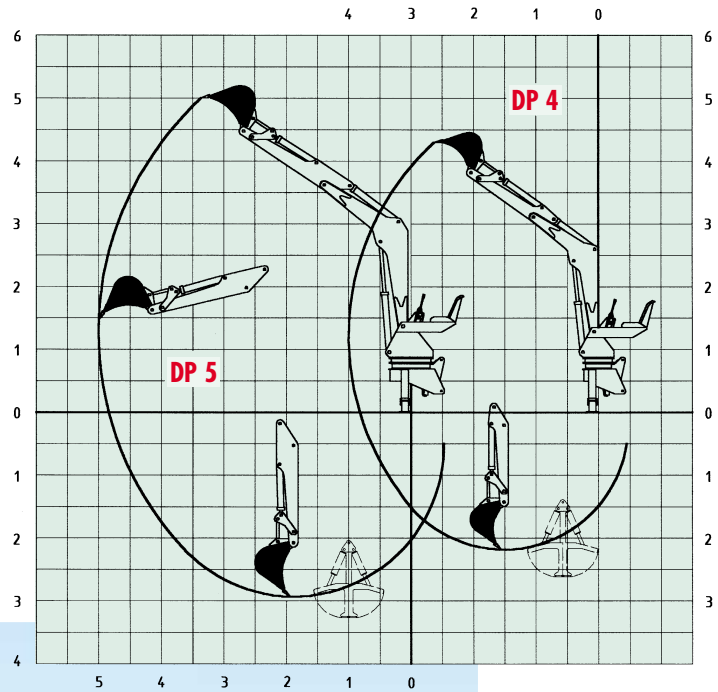

DP 4 DP 5



In-house
development
and production
according to
CE standards

Standard equipment:

- Control valve for hydraulic locking
- Endless slewing range
- Three-point linkage, category 2
- Rigid mounting of hydraulic pump
- Oil tank with return filter and inspection glass
- Heavy duty slew transmission 1:5

Special equipment:

- Hydraulic support, separately controllable
- Hydraulic locking system
- 2-lever (EURO) control
- Dung clam, earth scoop
- Timber clam with rotation servo
- Dipper shovel and ditch shovel

Universal use for excavator operation, loading of timber and dung as well as communal and recycling purposes.

Richard Ostler Maschinenbau GmbH · Schlingener Str. 2a · D-87668 Rieden b. Kaufbeuren
Telephone: +49 (0) 83 46/98 20 26 · Telefax: +49 (0) 83 46/98 20 27
e-mail: info@ostler-maschinen.de · www.ostler-maschinen.de