


Universal Loader FL 500

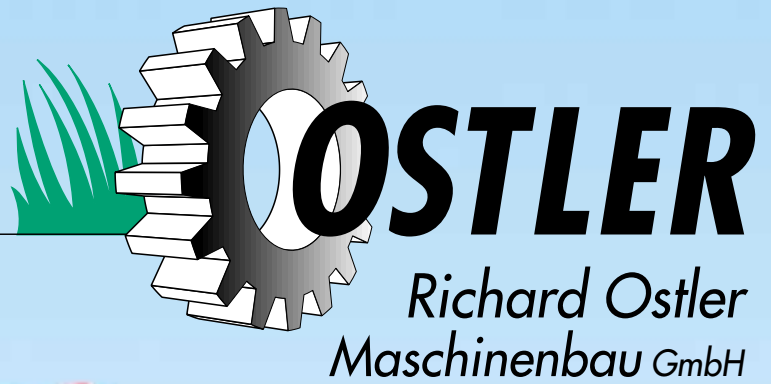

***The multitalent!***

• For all tractors or electromotors

• Time saving due to high capacity clam


## Technical Data:

## FL 500

Maximum range of dipper shovel . . . . .	5,150 mm
Maximum range of load hook . . . . .	4,300 mm
Maximum operational depth of dipper shovel . . . . .	3,000 mm
Maximum operational depth of earth scoop . . . . .	3,500 mm
Maximum operational height of load hook . . . . .	4,500 mm
Lifting capacity without appliance . . . . .	820-1,370 kg
Diameter of turntable . . . . .	700 mm
Speed of power take-off shaft . . . . .	540 revs/min
Slewing range . . . . .	endless
Wheel gauge . . . . .	1,800 mm
Overall width . . . . .	2,030 mm
Tyres . . . . .	10.0 / 75 - 15.3
Support alternatively . . . . .	hydraulic/mechanical
Dead weight incl. concrete ballast (without appliance) . . . . .	2,300 kg

Dimensions are not binding. Changes in design may be subject to alterations.

# Universal Loader

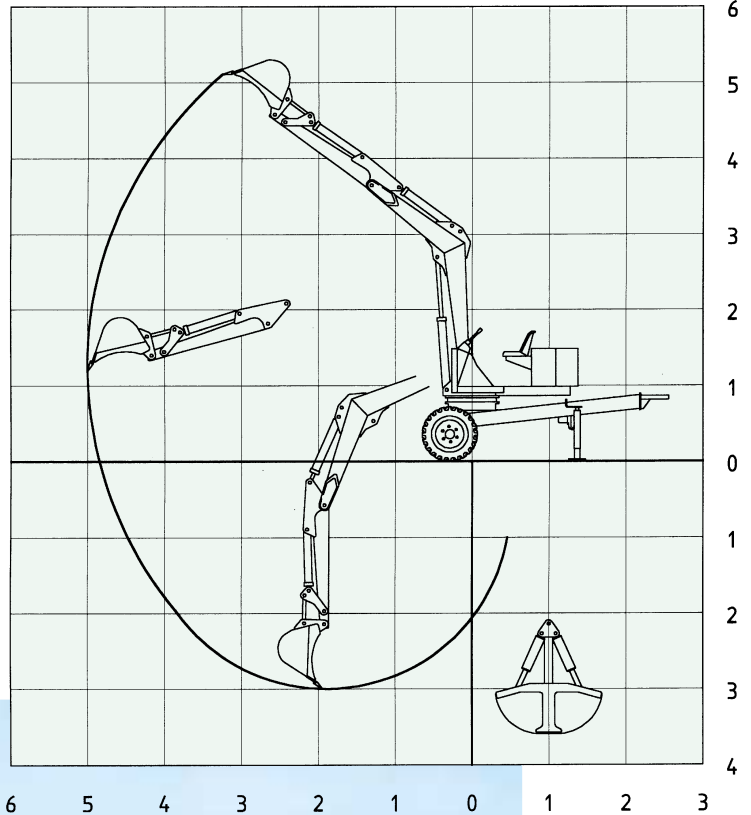

In-house development and production according to CE standards

# FL 500

### Standard Equipment:

- Hydr. control valve (fourfold), hand lever
- Seat and control system laterally arranged
- Covering of tube acc. to CE standards
- Tyres 10.0/75 - 15.3 impl. ply
- Concrete ballast

### Special Equipment:

- Dung clam, 2 x 6 tines
- Dipper shovel 30/40 cm
- Dipper shovel with discharger 30/40 cm
- Earth scoop
- Timber clam
- Rotation servo for earth scoop/timber clam

- Ditch shovel 75/100/125 cm
- Separate mechanical support
- Separate hydraulic support
- Electromotor 5.5 kw
- 2-lever (EURO) control
- Hour meter

Richard Ostler Maschinenbau GmbH · Schlingener Str. 2a · D-87668 Rieden b. Kaufbeuren

Phone: +49 (0) 8346/98 20 26 · Telefax: +49 (0) 8346/98 20 27

e-mail: info@ostler-maschinen.de · www.ostler-maschinen.de